

# LASER+

**in**




PERFORMANCE  
**in** LIGHTING

powered by  
**GEWISS**



# LASER+

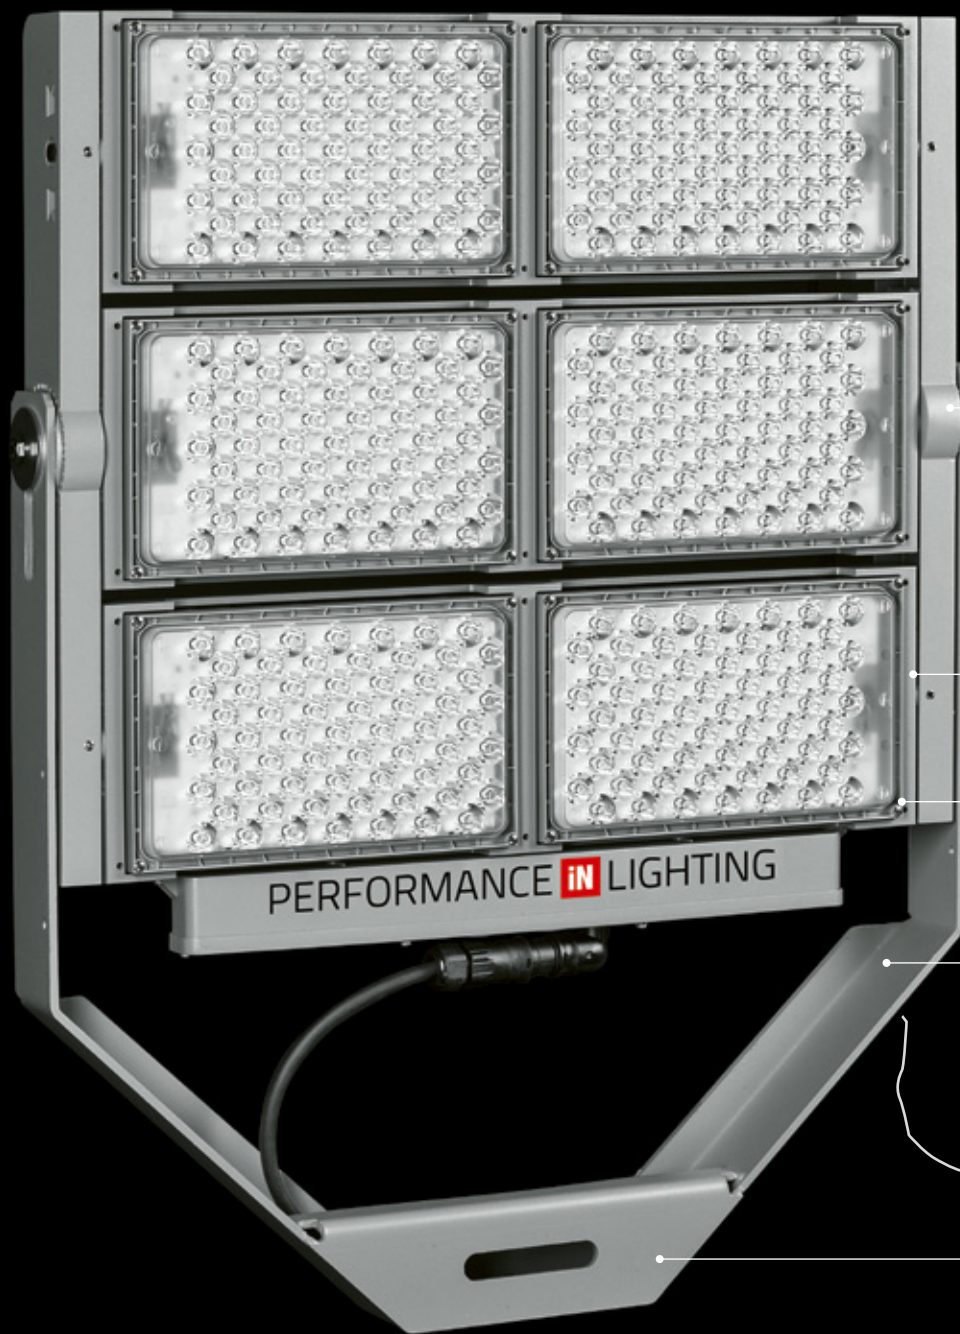

HD

Die-cast aluminum bearing structure painted with polyester powder coating after chemical conversion treatment of the surface

One-piece (no joints) wear-resistant silicone seals with high levelling capacity, high resiliency and high heat resistance

Stainless steel external screws


Hot galvanised and polyester powder coated steel bracket

The stainless steel bracket ensures mechanical solidity over time, preventing crushing collapses that may occur with aluminum alloy solutions

## Highlight the performance


Thanks to its advanced technology and meticulous design, LASER+ is the ultimate solution for professional and sport lighting. LASER+ is broadcast ready and is ideally conceived for lighting of large areas, stadia, warehouse areas, airports and sea terminals. It features extremely high performances and application flexibility thanks to its individually rotatable modules.






**LASER+ 10**

max 90.500 lm  
 max 542 W  
 EPA front max 0,34 m<sup>2</sup>  
 max 25 kg



**LASER+ 20**

max 177.000 lm  
 max 1.060 W  
 EPA front max 0,37 m<sup>2</sup>  
 max 29 kg



**LASER+ 30**

max 265.800 lm  
 max 1.592 W  
 EPA front max 0,5 m<sup>2</sup>  
 max 38 kg


TRAINING



SPORTS ARENAS



STADIA

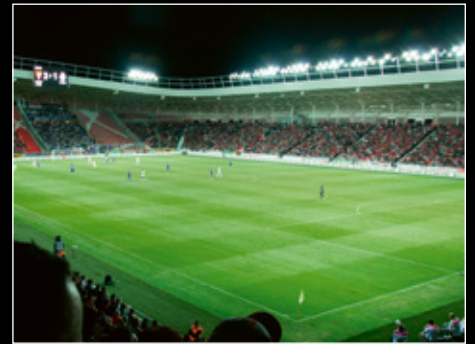

WATER SPORTS



PORTS



AIRPORTS



FAÇADES



PARKING LOTS



LARGE AREAS





# Optics

**C/I**  
circular optics



10° 13° 16°

**A/W**  
asymmetrical optics





IMAX 35° IMAX 50° IMAX 60°

**ELL**  
elliptical optics



10°x25° 15°x34° 30°x45°

**LED**

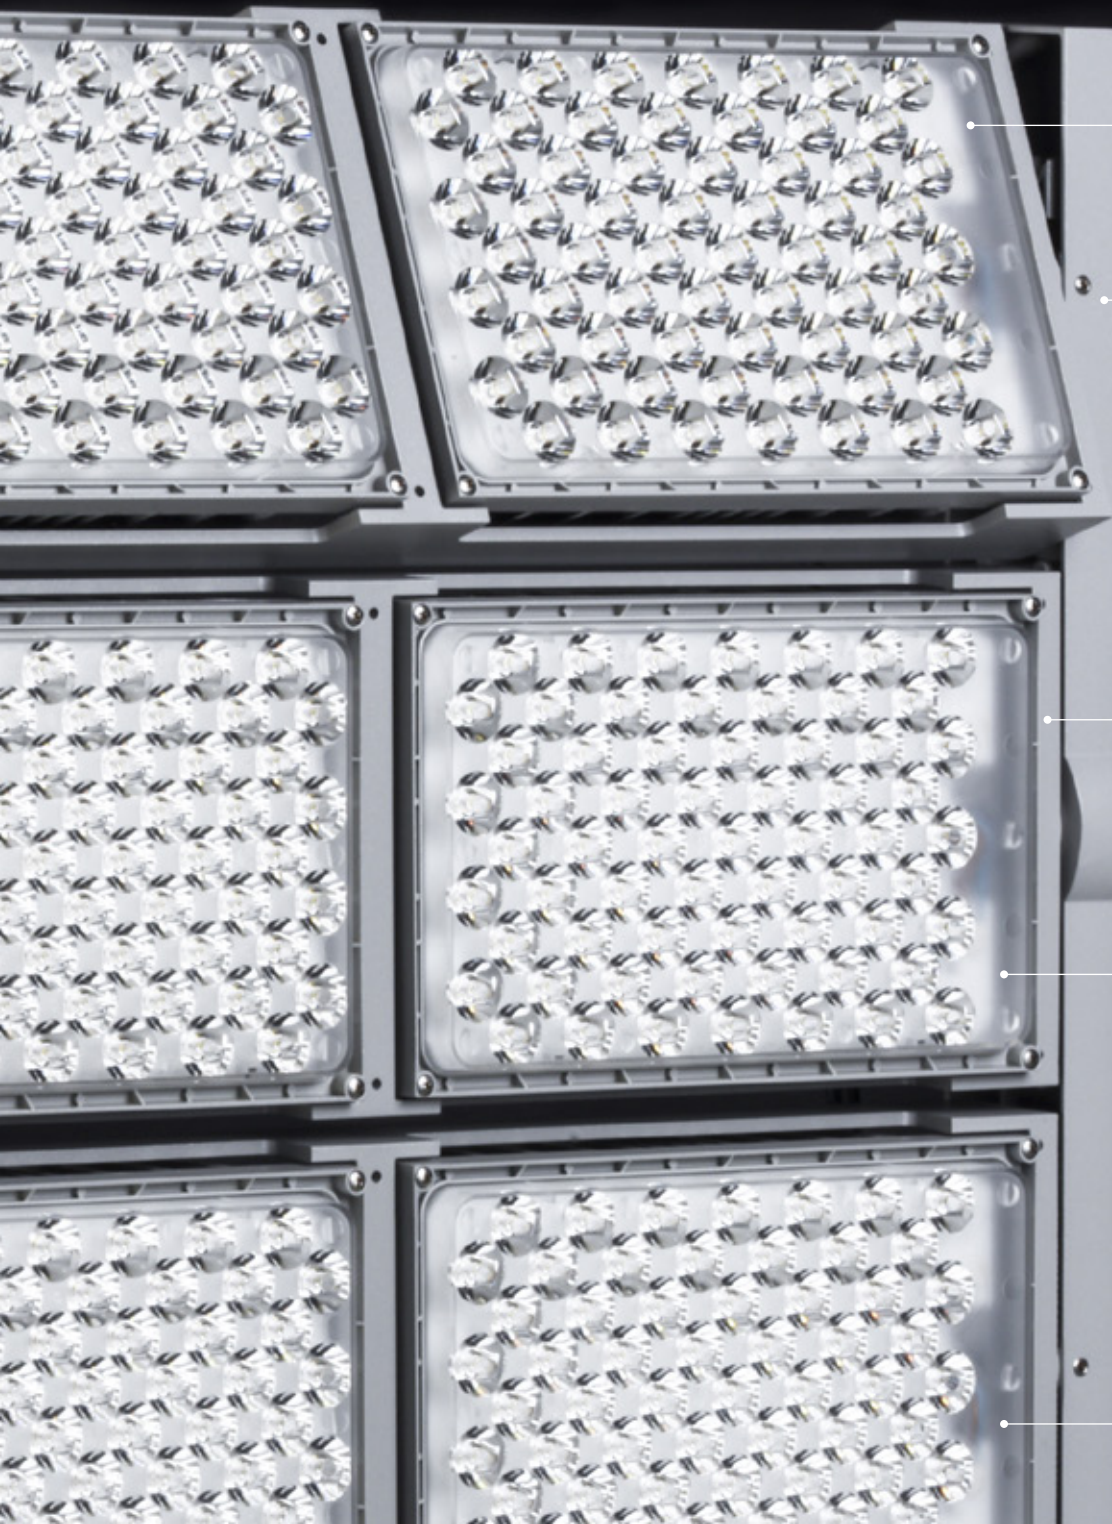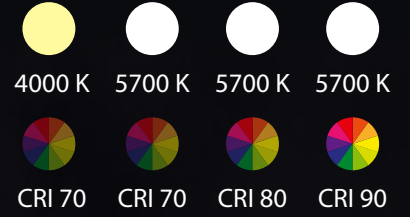

Independent and separate LED modules to optimize heat dissipation


Set screws lock the rotation of each adjustable module

High-transparency polycarbonate optical lenses for best light transmission


Light beam obtained by the combination of multiple LED modules

Diffuser with integrated optical lenses in UV, heat stabilised, transparent techno polymer


# Aiming regulations

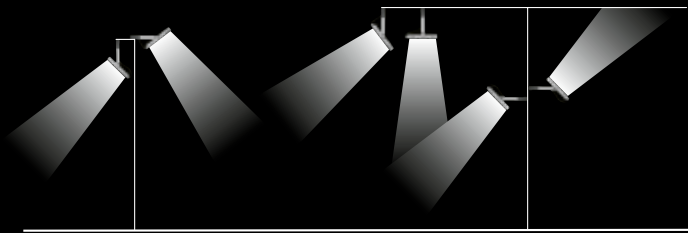

For UP LIGHT installation, consult factory

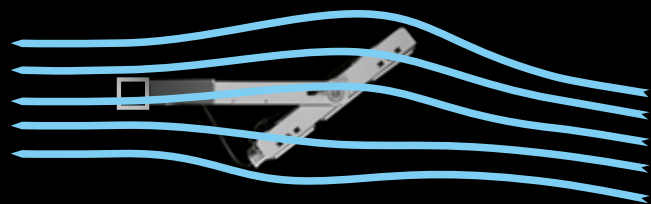

Wind resistance can be minimised by adjusting the inclination of the fixture

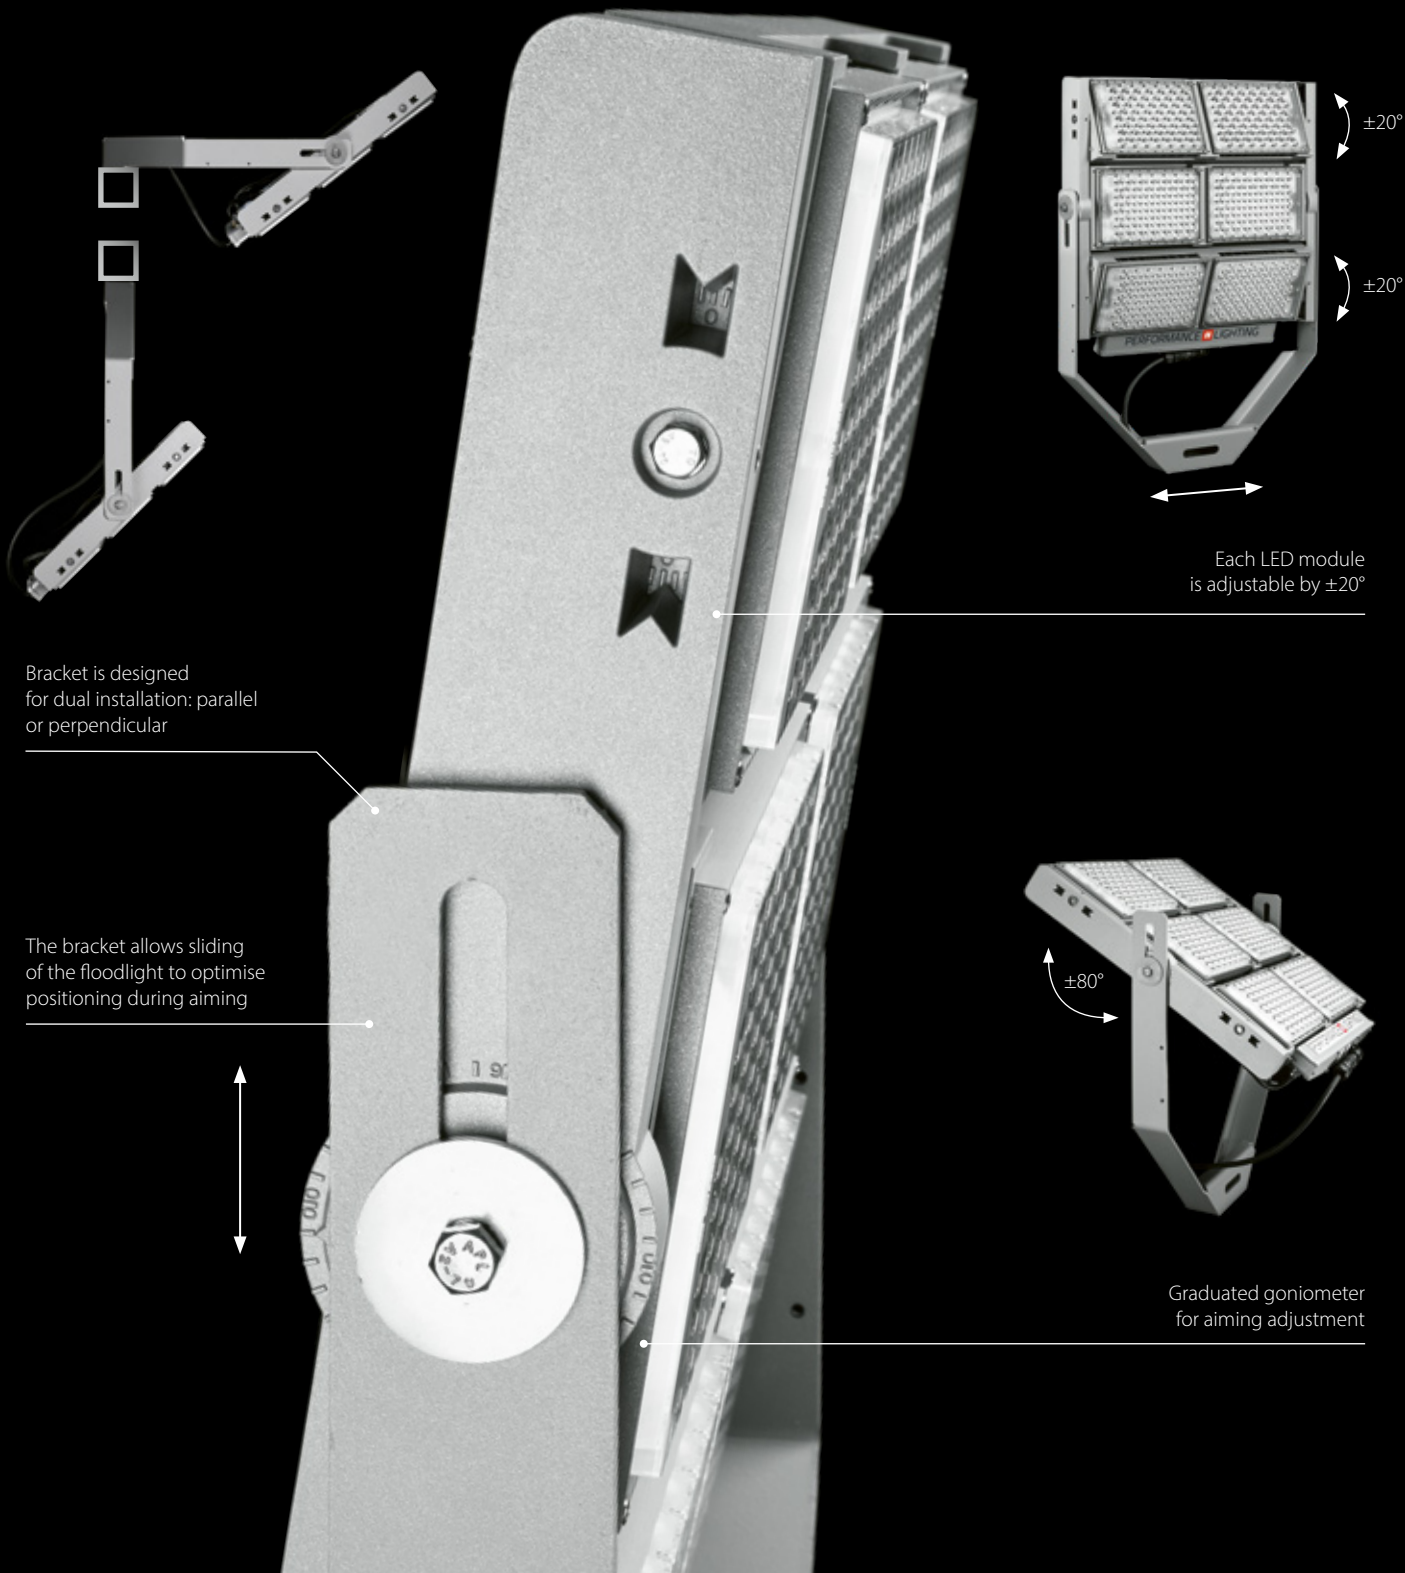

Bracket is designed for dual installation: parallel or perpendicular

The bracket allows sliding of the floodlight to optimise positioning during aiming

Each LED module is adjustable by  $\pm 20^\circ$

Graduated goniometer for aiming adjustment

$\pm 80^\circ$



$\pm 20^\circ$

$\pm 20^\circ$





# Thermal studies

## TA STANDARD

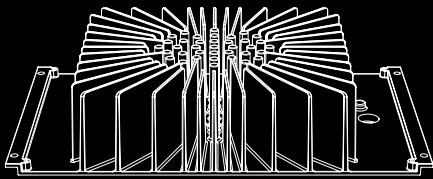


High efficiency heat sink made in die-cast aluminum

## TA EXTREME

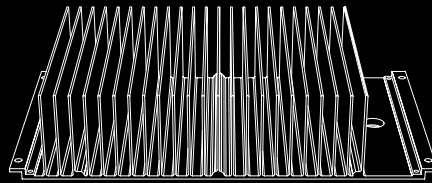


Anodised extruded aluminum ultra high efficiency heat sink

The correct sizing of the heat sinks is the result of thorough fluid dynamics studies, and ensures a constant luminous flux up to the maximum declared ambient temperature (without flux decrease at high temperatures)

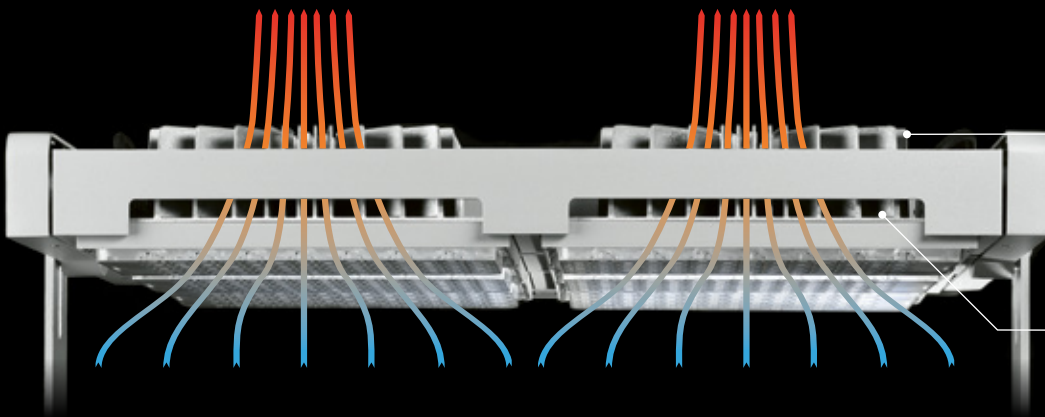

Designed with special openings to facilitate air passage through the heat sinks

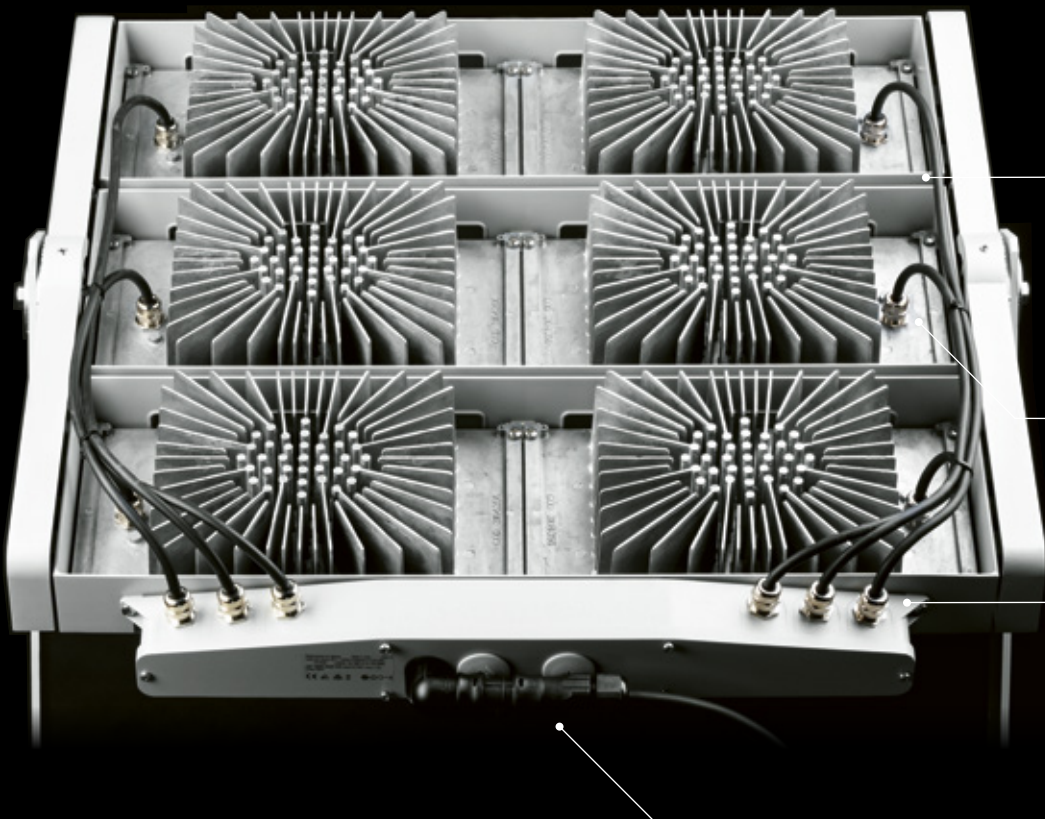

Openings allow the air to flow through the modules for optimal heat dissipation

The electrical connection between the light engine and the waterproof junction box is insured by a metal cable gland and an extra sealing


Die-cast aluminum electrical junction box

Easy electrical connection through an IP66 quick connector. There is no need for the installer to open the fixture to perform the electrical connection.


# Modularity



LASER+ 10



LASER+ 20




LASER+ 30

Future proof, replaceable LED modules

# Power supply units

Vertical mounting bracket for light towers

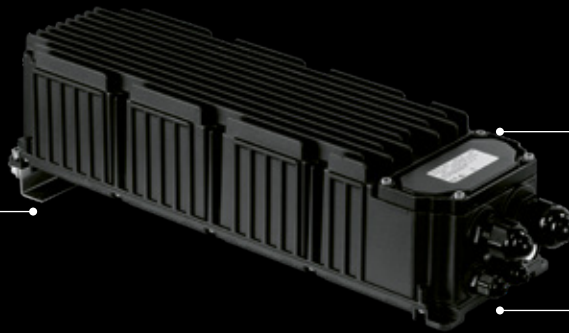

The power supply groups are protected against mains power surges of up to 10 kV (CM and DM)

IP66 DALI and DMX512-RDM dimming power supply units available





# Accessories




VISOR



SIGHT MOUNT



The electrical connection between the control gears and the floodlights must take place with a maximum cable length of 100 metres



## GOOD REASONS FOR CHOOSING US



Decades of presence on the market. Design and production rooted in the values of Made in Italy and Made in Germany.



Use of leading brands for electronic components.

<1%

Great performance over time with a defect rate of less than 1%.



Five-year warranty on the entire luminaire, extendable up to ten for special projects.



Clear conditions, real lumen indicate the luminous flux output of the luminaire.



Internal laboratories approved by third parties (CTF Stage 2 and WTDP). Ecodesign-EPREL compliance. Company with ISO 9001 quality management system.



The products with die-cast aluminium body with polyester powder finish after surface chemical conversion treatment in compliance with ISO 9227 and ISO 12944, are resistant to corrosion and suitable for C5 areas (ISO 9223).

## FUTURE PROOF ▶▶

"Future-Proof" products with longer life LEDs and replaceable lighting systems for future upgrades. Exceptional longevity and savings with a real contribution to the circular economy.



Pre and post sales technical support and lighting consultancy to meet assorted needs, even the most demanding calls for tenders.



Wide range of lighting solutions for the most varied applications, all from a single supplier.



## BIM

BIM ready for projects with Dialux, Relux, Litestar software and Autodesk® Revit® Building Information Modeling (BIM) software.



## PRONTO

The PRONTO program ensures availability and speed of shipment.



EcoVadis certification, bronze medal in recognition of the achievements in sustainability.



**PERFORMANCE in LIGHTING S.p.A**  
Viale del Lavoro 9/11  
37030 Colognola ai Colli (VR) - Italy  
T +39 045 61 59 211  
F +39 045 61 59 393

[www.performanceinlighting.com](http://www.performanceinlighting.com)