

INSERT+ series



PERFORMANCE
iN LIGHTING

powered by
GEWISS

INSERT+ series

Walk with safety

This successful series has been synonymous with recessed wall luminaires since 1980. Style and technique follow a direction of evolution, not revolution. Initially offered with traditional light sources, the INSERT series has evolved into an LED offering. This series provides improved visual comfort; energy saving is an accent, and marker-light is illuminating where needed.

The retrofit subframe Kit may offer an essential reduction in installation costs (INSERT+ 1 / 2).

A ZERO size completes this series, also available in a version without visible screws (CLIPS) and full glass for diffuse light emission (GLASS).

The solid-brass version is suitable for seaside installation and ideal for saline and windswept settings (MARINE).

Also, as part of this series, a professional size INSERT+ 3 is conceived for public applications.



INSERT+ ZERO
p. 4



INSERT+ ZERO CLIP
p. 4



INSERT+ ZERO GLASS
p. 5



INSERT+ 1
p. 6




INSERT+ 1 MARINE
p. 7



INSERT+ 2
p. 6



INSERT+ 3
p. 10

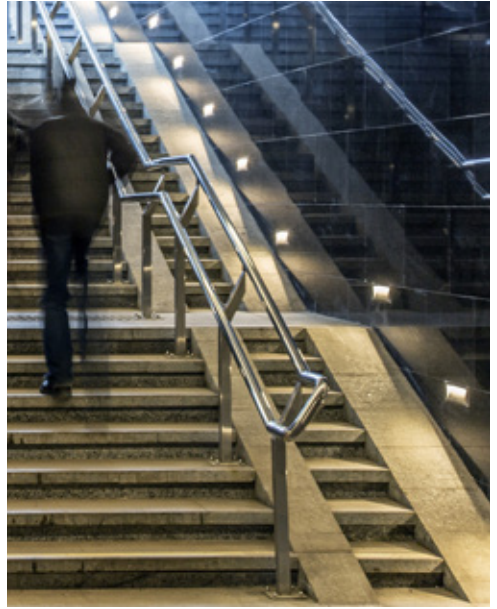

PRONTO | Core program

The "PRONTO" program consists of those article codes which you may more easily find in stock. These codes are generally available with shorter delivery times. Please select these codes when "quick ship" lead time is necessary for your project.

INSERT+ ZERO



- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured




Scan the QR-code for the latest information



INSERT+ ZERO

IP65 - IK08

LUMINAIRE WATTAGE (W)	CLASS	EMEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRICE	PHOTO
Power LED 220-240 V 50/60 Hz												
4.5	I	-	80	4000	A29/M	-	530	142	■	304111	97,00	-
4.5	I	-	80	3000	A29/M	-	511	125	■	304110	97,00	-
4.5	I	-	80	4000	A29/M	-	530	142	■	304113	97,00	
4.5	I	-	80	3000	A29/M	-	511	125	■	304112	97,00	
4.5	I	-	80	4000	A29/M	-	530	142	□	304109	97,00	-
4.5	I	-	80	3000	A29/M	-	511	125	□	304108	97,00	



INSERT+ ZERO CLIP



- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured




Scan the QR-code for the latest information


INSERT+ ZERO CLIP

IP65 - IK08

LUMINAIRE WATTAGE (W)	CLASS	EMEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRICE	PHOTO
Power LED 220-240 V 50/60 Hz												
4.5	I	-	80	3000	A/M	-	511	142	■	3100064	97,00	-
4.5	I	-	80	3000	A/M	-	511	142	■	3100066	97,00	
4.5	I	-	80	3000	A/M	-	511	142	□	3100062	97,00	



INSERT+ ZERO GLASS




Scan the QR-code for the latest information

WH-87 / White / Textured

INSERT+ ZERO GLASS

IP65 - IK05

LUMINAIRE VOLTAGE (V)	CLASS	ENEC	CR	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRICE	PROFIT
Power LED 220-240 V 50/60 Hz												
4.5	I	-	80	3000	S/EW	-	511	78	<input type="checkbox"/>	3114950	123,00	-
4.5	I	-	80	2700	S/EW	-	511	73	<input type="checkbox"/>	3114949	123,00	-



INSERT+ 1/2




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

INSERT+ 1

IP65 - IK07


LUMINAIRE VATTAGE (W)	CLASS	ENERG	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRICE TO
6	I	-	80	4000	A37/M	-	850	275	■	304117	163,00
6	I	-	80	3000	A37/M	-	825	250	■	304116	163,00
6	I	-	80	4000	A37/M	-	850	275	■	304119	163,00
6	I	-	80	3000	A37/M	-	825	250	■	304118	163,00
6	I	-	80	4000	A37/M	-	850	275	□	304115	163,00
6	I	-	80	3000	A37/M	-	825	250	□	304114	163,00



INSERT+ 2

IP65 - IK07 - 650 °C

LUMINAIRE VATTAGE (W)	CLASS	ENERG	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRICE TO
10	I	-	80	4000	A25/W	-	1410	553	■	304123	185,00
10	I	-	80	3000	A25/W	-	1350	503	■	304122	185,00
10	I	-	80	4000	A25/W	-	1410	553	■	304125	185,00
10	I	-	80	3000	A25/W	-	1350	503	■	304124	185,00
10	I	-	80	4000	A25/W	-	1410	553	□	304121	185,00
10	I	-	80	3000	A25/W	-	1350	503	□	304120	185,00



INSERT+ 1 MARINE




Scan the QR-code for the latest information

BR-10 / Natural brass / Glossy

INSERT+ 1 MARINE

IP65 - IK07

LUMINAIRE SURFACE (W)	CLASS	EMC	EMF	RELYN	OPTIC	BEAM ANGLE	LIGHT SOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRICED TO
Power LED 220-240 V 50/60 Hz											
6	I	-	80	4000	A37/M	-	850	354		304792	204,00 -
6	I	-	80	3000	A37/M	-	825	325		304791	204,00 -



MANDATORY ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER	PRICED TO
INSERT+ 1 MARINE			
Recessed box INSERT+ 1		310475	13,00



310475



INSERT conversion solutions

Adaptor kit for converting INSERT series luminaires into INSERT+ LED (incandescent or fluorescent sources).

Advantages of LED conversion:

- immediate energy saving;
- speed of installation;
- no masonry work.



	INSERT 1		INSERT+ 1
	Traditional	Fluorescent	LED
Light source			LED
Luminaire wattage [W]	40	9	6
Annual consumption [kW]	175	39	26





	INSERT 2		INSERT+ 2
	Traditional	Fluorescent	LED
Light source			LED
Luminaire wattage [W]	60	18	10
Annual consumption [kW]	263	79	44




Examples of operation on an average dark hours estimate equal to 4376 h / year.

MANDATORY ACCESSORIES


DESCRIPTION	COLOR	PART NUMBER	PRICE	PRONTO
INSERT+ 1				
Recessed box INSERT+ 1		310475	13,00	
INSERT+ 2				
Recessed box Insert + 2		310490	16,00	



Complete unit
 1A+1B = please order 2 codes
 COMPONENTS
A luminaire
B recessed fixing kit



310475




310490

OPTIONAL ACCESSORIES


DESCRIPTION	COLOR	PART NUMBER	PRICE	PRONTO
INSERT+ 1				
Adaptor INSERT+ 1 (retrofit kit Insert 1)		310476	16,00	-
Adaptor INSERT+ 1 (retrofit kit Insert 1)		310477	16,00	-
Adaptor INSERT+ 1 (retrofit kit Insert 1)		310478	16,00	
INSERT+ 2				
Adaptor INSERT+ 2 (retrofit kit Insert 2)		310487	16,00	-
Adaptador INSERT+ 2 (retrofit kit Insert 2)		310488	16,00	-
Adaptor NSERT+ 2 (retrofit kit Insert 2)		310489	16,00	
Connection Kit Y 3-way D.14-17mm IP68		310495	16,00	-
Connection Kit Y 3-way D.7-10.5mm IP68		310496	16,00	-



310495
310496



INSERT 1




INSERT 2




Complete unit
 1A+1C = please order 2 codes
 COMPONENTS
A luminaire
C adaptor




INSERT+ 1



INSERT+ 2




310478



310489

INSERT+ 3




Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured

INSERT+ 3 A/W

IP66 - IK10

LUMINAIRE WATTAGE (W)	CLASS	EMEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRICETO
Power LED 220-240 V 50/60 Hz											
27	I	-	80	4000	A/W	-	4140	1592	■	3100879	262,00 -
27	I	-	80	3000	A/W	-	4020	1502	■	3100877	262,00 -
27	I	-	80	4000	A/W	-	4140	1592	■	3100878	262,00 -
27	I	-	80	3000	A/W	-	4020	1502	■	3100876	262,00 -



INSERT+ 3 A26/W

IP66 - IK10

LUMINAIRE WATTAGE (W)	CLASS	EMEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOR / FINISH	PART NUMBER	PRICETO
Power LED 220-240 V 50/60 Hz											
26	I	-	70	4000	A26/W	-	3585	1399	■	3100875	327,00 -
26	I	-	70	3000	A26/W	-	3450	1388	■	3100881	327,00 -
26	I	-	70	4000	A26/W	-	3585	1399	■	3100882	327,00 -
26	I	-	70	3000	A26/W	-	3450	1388	■	3100880	327,00 -

MANDATORY ACCESSORIES


DESCRIPTION	COLOR	PART NUMBER	PRICETO
INSERT+3			
Recessed box INSERT+3		3100883	71,00 -



3100883

OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER	PRICETO
INSERT+ 3			
Stainless steel, anti-tamper locking screws		3100992	6,00 -
Connection Kit Y 3-way D.14-17mm IP68		310495	16,00 -
Connection Kit Y 3-way D.7-10.5mm IP68		310496	16,00 -




3100992




310495
310496

Identifying and classifying our optics



INSERT+3 A/W



INSERT+3 A26/W



The data contained in this brochure is for reference purposes only and does not involve any commitment by Performance iN Lighting S.p.A., which reserves the right to make all necessary changes without prior notice. Partial or complete reproduction of this brochure is forbidden.



PERFORMANCE iN LIGHTING S.p.A.

Viale del Lavoro 9/11
37030 Colognola ai Colli (VR) - Italia
Ph +39 045 61 59 211
Fax +39 045 61 59 292

www.performanceinlighting.com

